

High pressure shut-off valve, article 67-VA

diameter G 1/4" up to G 1 1/2"



High pressure shut-off valve with adjustable gland packing for use in industrial systems, in which flowing liquids or gaseous media have been shut off. This can also be done under high pressure. The flow direction is indicated on the body by arrow.


Please observe the pressure reduction from temperatures over +50 °C !

☞ Both sides with female threads acc. to EN 228-1 (DIN 259), cylindric.

	ambient	-20°C ... +60°C
	medium	-40°C ... +250°C special packing up to +550 °C

Before risk of frost empty the valve and ensure that the valve is depressurized. Freezing of the fluid may can seriously damage the valve.


diagram pressure drops

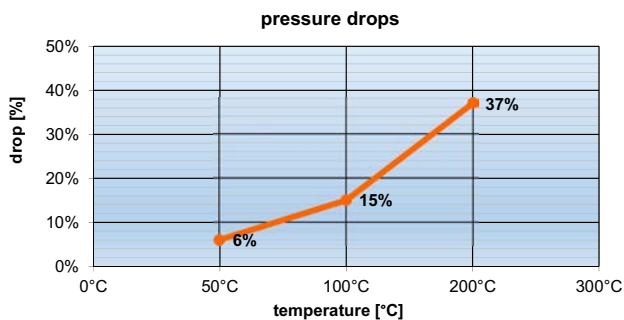

temperature	pressure drop %	max. pressure article 67-VA (1/4" up to 1/2")	max. pressure article 67-VA (3/4" up to 1")	max. pressure article 67-VA (1 1/4" up to 1 1/2")
50° C	6%	598,5 bar	300,8 bar	150,4 bar
100° C	15%	535,5 bar	272,0 bar	136,0 bar
200° C	37%	396,9 bar	201,6 bar	100,8 bar


Article 67-VA

Pos.	description	material
1	body	stainless steel 1.4571
2	stem	stainless steel 1.4571
3	regulating disc	stainless steel 1.4571
4	head piece	stainless steel 1.4571
5	sealing ring	stainless steel 1.4571
6	lower gland	stainless steel 1.4571
7	gland packing	Teflon
8	upper gland	stainless steel 1.4571
9	union nut	stainless steel 1.4571
10	hand wheel	pressed steel, black
11	hand wheel nut	

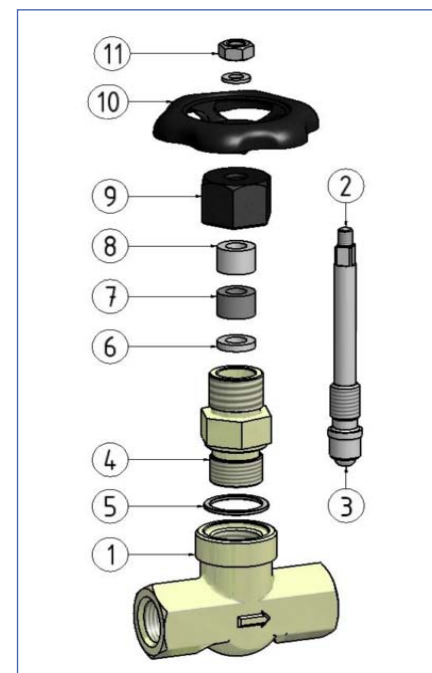

High pressure shut-off valve, article 67-VA

diameter G 1/4" up to G 1 1/2"

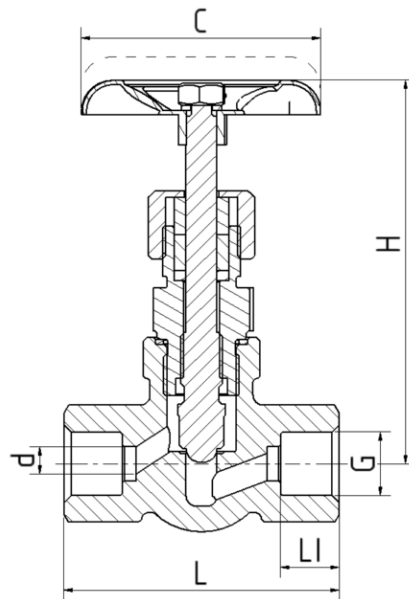

	article no.	L (mm)	H (mm)	LI (mm)	C (mm)	d (mm)	pressure rating (bar)	Kv-value [m ³ /h]	weight (kg)
diameter	67-VA 1.4571								
G 1/4"	06.1023.6.61	80	120	15	70	5	640	0,42	0,74
G 3/8"	06.1023.6.62	80	120	15	70	6	640	0,53	0,74
G 1/2"	06.1023.6.63	80	120	17	70	8	640	0,83	0,69
G 3/4"	06.1022.6.65	100	135	19	90	10	320	1,40	1,12
G 1"	06.1022.6.67	130	166	21	100	15	320	3,00	2,15
G 1 1/4"	06.1020.6.68	130	166	22	100	20	160	3,50	1,98
G 1 1/2"	06.1020.6.69	160	218	24	150	25	160	7,80	4,60