

Flange globe valve, article 302-RG

diameter DN 15 up to DN 100

Flange globe valve, stem with adjustable gland packing, disc -metal sealing-. Closed design, tightness class A acc. to EN 12266-1 = no leakiness. Flanges are measured and drilled acc. to EN 1092-2, form B2.

Pressure range up to PN 16. Face to face acc. to work standard.

For general industrial applications, especially for cold and hot water supply and steam range up to max. +170 °C.


Possible variants: Flange drilling acc. to DIN EN 1092-3
PN 6 is possible



CE	0086
T°C	ambient -10°C ... +80°C
T°C	medium -10°C ... +170°C

Article 302-RG

description	material
body	red brass CC491K
bonnet	brass CW617N
stem	brass CW617N
stem sealing	AF15/MA
disc	brass CW617N
hand wheel	die-cast aluminium, red

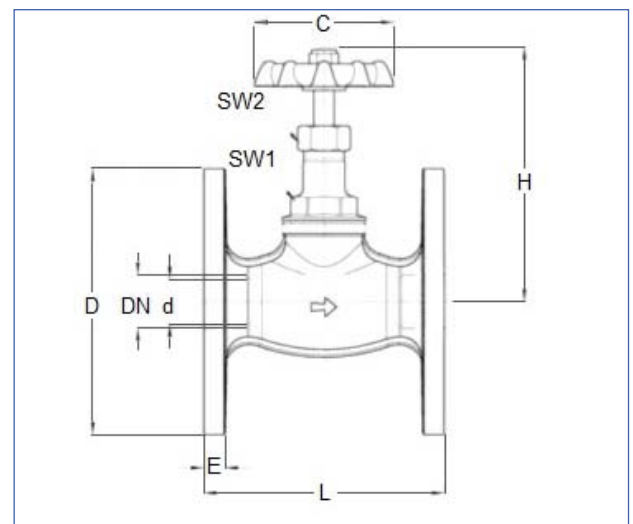

diameter	order number											
		L (mm)	H (mm)	C (mm)	D (mm)	d (mm)	E (mm)	SW1 (mm)	SW2 (mm)	Kv-value m ³ /h	pressure rating PN	weight (kg)
DN 15	34.0248.1.11	84	89	55	80	15	8,0	23	18	2,3	16	1,38
DN 20	34.0248.1.13	95	101	55	90	20	8,0	23	18	4,8	16	1,71
DN 25	34.0248.1.15	105	113	65	100	25	9,5	28	21	7,0	16	2,35
DN 32	34.0248.1.18	115	115	65	120	32	9,5	33	23	11,0	16	3,35
DN 40	34.0248.1.19	134	147	80	130	40	11,0	37	25	17,0	16	4,58
DN 50	34.0248.1.21	154	157	80	140	50	11,0	45	27	25,0	16	5,93
DN 65	34.0248.1.24	170	201	120	160	70	13,0	55	37	57,0	16	9,01
DN 80	34.0248.1.25	180	226	120	190	80	13,0	63	39	72,0	16	11,65
DN 100	34.0248.1.27	200	288	175	230	100	17,0	80	50	120,0	16	18,11

302-RG_ENG_2017_Rev. 0