

Globe valve, article 100-RG/LM

diameter G 1/2" up to G 2"

Globe valve made of red brass with screwed top and adjustable gland packing. Heavy duty series, pressure range PN 16.

-metal sealing-

Suitable for cold and hot water, saturated and wet steam, mineralized oils and lipids, as well as air and gaseous media.



☛ Both sides with cylindrical female threads acc. to EN ISO 228-1



	ambient -20°C ... +80°C
	medium -15°C ... +160°C

Article 100-RG/LM

Pos.	description	material
1	body	red brass G-CU-Sn 5 Zn Pb
2	bonnet	G 1/2" - G 1" brass Cu Zn 36 Pb 3 G 1 1/4" - G 2" red brass G-Cu-Sn 5 Zn Pb
3	stem	brass Cu Zn 39 Pb 2
4	sealing	metal sealing brass Cu Zn 39 Pb 2
5	lock nut	brass Cu Zn 39 Pb2
6	gland nut	G 3/8" - G 1 1/2" brass Cu Zn 36 Pb 3 G 2" red brass G-Cu-Sn 5 Zn Pb
7	gland ring	brass Cu Zn 36 Pb3
8	gland packing	graphite
9	hand wheel	cast iron or zinc die-cast
10	nut	

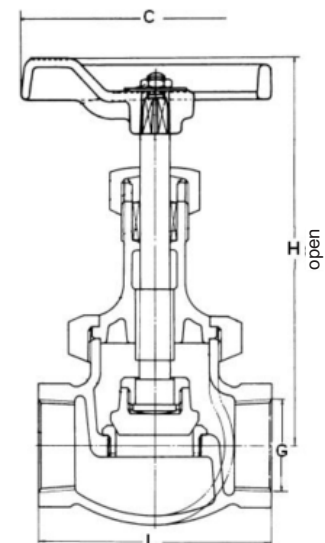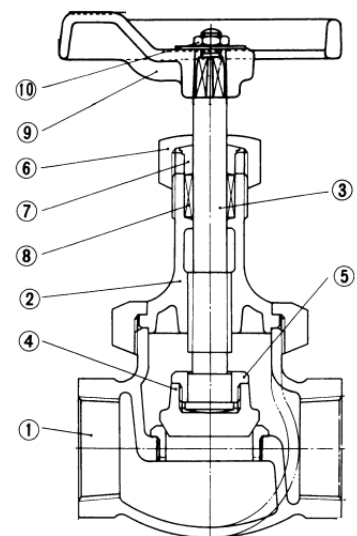

diameter	article number 100-RG / LM metal sealing	L (mm)	H (mm)	C (mm)	weight (kg)	pressure rating (bar)
G 1/2"	66.0616.1.63	50	63	51	0,23	16
G 3/4"	66.0616.1.65	55	65	57	0,29	16
G 1"	66.0616.1.67	63	83	64	0,45	16
G 1 1/4"	66.0616.1.68	73	101	68	0,72	16
G 1 1/2"	66.0616.1.69	82	122	75	1,06	16
G 2"	66.0616.1.71	99	133	96	1,46	16