

Gate valve, article 508-MS

diameter G 1/2" up to G 4"

Gate valve with screwed top and non-rising stem. Wedge conical, 100% metal sealing. Stem sealing adjustable by gland nut.

Both sides with female thread acc. to DIN ISO 228-1


For neutral, gaseous and liquid media. Usage in general industrial areas.




Article 508-MS

Pos.	description	material
1	body	G 1/2" - 2" brass CW617N G 2 1/2" copper-zinc CC754S
2	bonnet	brass CW617N
3	disc	brass CW617N
4	stem	brass CW617N
5	gland packing	AF 15/MA
6	gland nut	brass CW617N
7	gland	brass CW617N
8	hand wheel	galvanised steel, red painted
9	self-locking nut	steel

	ambient	0° C....+ 50°C
	medium	0° C....+150°C

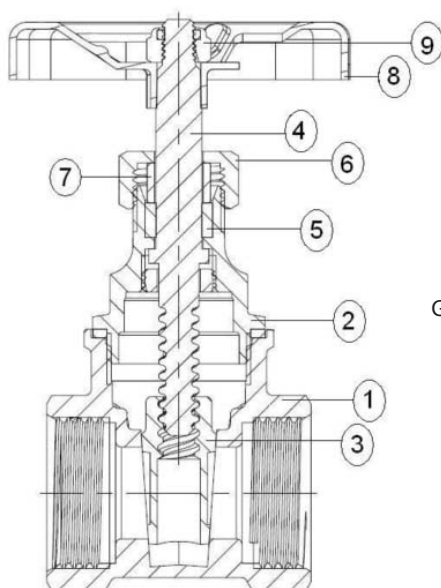


G 1/2" - G 2"

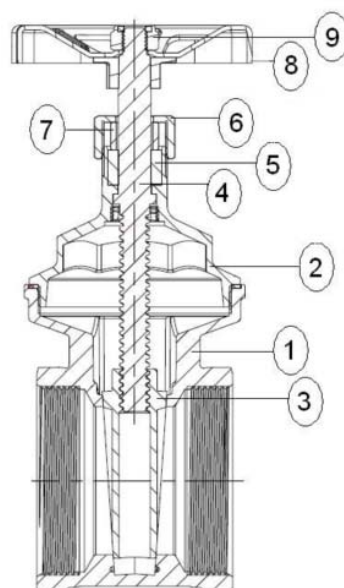

G 2 1/2" - G 4"

Gate valve, article 508-MS

diameter G 1/2" up to G 4"

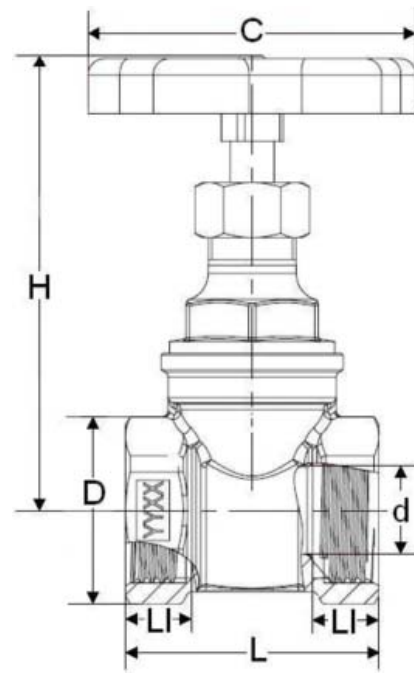

diameter	order number								
	508-MS brass	L (mm)	LI (mm)	d (mm)	D (mm)	H (mm)	C (mm)	pressure rating (bar)	weight (kg)
G 1/2"	26.3016.0.63	42	10,0	13	50	72,0	50	16	0,22
G 3/4"	26.3016.0.65	46	12,0	16	60	82,0	60	16	0,28
G 1"	26.3016.0.67	50	14,0	23	60	95,5	60	16	0,40
G 1 1/4"	26.3016.0.68	55	16,0	28	70	104,1	70	16	0,61
G 1 1/2"	26.3016.0.69	60	17,0	33	70	116,6	70	16	0,77
G 2"	26.3016.0.71	67	18,0	45	80	138,7	80	16	1,21
G 2 1/2"	26.3016.0.72	78	19,0	59	100	181,1	100	16	2,11
G 3"	26.3016.0.73	83	22,0	68	100	202,1	100	16	3,11
G 4"	26.3016.0.75	100	25,5	85	120	236,9	120	16	5,01