


**Ball hose bibcock, article 10-MS/KH (standard handle)  
10-MS/KH/F (butterfly handle)**

**diameter G 1/2" up to G 1"**

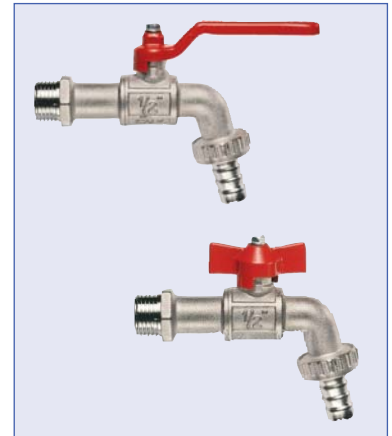

ball hose bibcock as a tap fitting  
one side external threads acc. to DIN/ISO 228  
other side hose connection acc. to measurement  
standard. With standard-handle,  
optionally butterfly handle



Sizes	Hose nozzle Ø
1/2"	13 mm hose
3/4"	19 mm hose
1"	25 mm hose

	ambient -15°C ... +80°C
	medium 0°C ... +80°C

Before risk of frost empty the drain cock and ensure that the drain cock is depressurized. Freezing of the fluid may seriously damage the valve.

**Article 10-MS/KH and 10-MS/KH/F**

Pos.	description	material
1	body	brass CW 617N nickel-plated
2	ball	brass CW 617N chrome-plated
3	stem	brass CW 614N
4	ball sealing	PTFE-shells
5	hose connection	brass CW 617 nickel-plated
6	handle	steel, red powder-coated

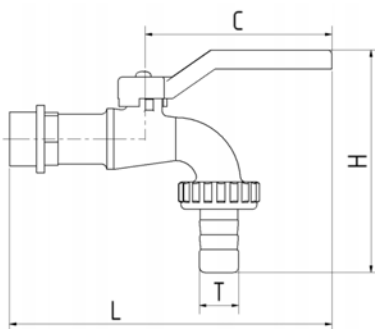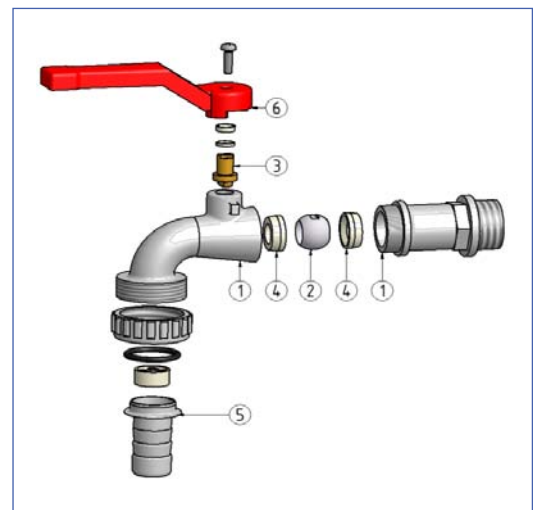

diameter	article no.	C (mm)	article no.	C (mm)	L (mm)	H (mm)	hose LW T (mm)	pressure rating (bar)	weight (kg)
	article 10-MS/KH standard handle		article 10-MS/KH/F butterfly handle						
G 1/2"	26.3704.0.63	80,0	26.3702.0.63	47	137,0	93	13	15	0,260
G 3/4"	26.3704.0.65	88,5	26.3702.0.65	54	148,5	108	19	15	0,405
G 1"	26.3704.0.67	88,5	26.3702.0.67	62	158,0	126	25	12	0,502

10-MS\_KH\_ENG\_2021\_Rev.0